

5300 Marine Series



The Legge 5300 Series narrow stile furniture has been designed for heavy duty commercial applications. This Series is constructed from 316 marine grade stainless steel, making it suitable for both external and internal applications.

It also suits high traffic applications, such as retail educational, government buildings, healthcare, and commercial premises. The narrow plate is ideal for use on narrow aluminium or timber stiles.

316 marine grade stainless steel properties include increased wear resistance, corrosion resistance, and suitability for coastal applications.

Features

- Constructed of quality components, with cast 316 grade stainless steel levers and plates
- The heavy duty spring provides a smooth, fast return action of the lever and eliminates droop extending the life of the furniture
- The handing mechanism of this Series allows the furniture to be handed on site, prior to installation by rotating the lever to the preferred hand and fitting the stop block to secure it's position
- The Alpha lever is AS1428:1-2009 compliant







Specification guide

	Brand	Function	Levers	Finish
	LeggeL	refer following pages	Alpha29	Matte Black Powder CoatMB Satin Stainless SteelSSS
1	Function Select the desired function e.g. External plate with cylinder			
2	Lever Select the required lever design e.g. Alpha #29			
3	Finish Select the desired finish e.g. Sa	atin stainless steel		L5300/29SSS

Finishes



Lever handing




Handing is as simple as a turn


Handing of the lever is as simple as rotating the handle 180° as illustrated. The spring simply needs to be guided into the channel once the handing has been determined.

Specifications

Door type	Timber or metal		
Door thickness	32mm to 50mm (51mm to 75mm with optional extended screws)		
Fixing centres	159mm		
Plate height	185mm		
Plate width	25mm		
Plate thickness	12mm		
Lever to cylinder centres	90mm for 995MF mortice lock		
Spindle size	7.6mm		
Compatible locks/latches	Legge 995MF		
Fixing	Back to back. External plates concealed fixing. Screws supplied with exterior plates only. 75mm M4 screw		
Materials	Cast 316 grade stainless steel		

Handing guide





Testing and Compliance



Accessibility: Compliant to the AS 1428:1-2009 Design for Access and Mobility

Caution:When door closers are installed and adjusted to meet reduced opening force requirements, there may be insufficient power to reliably close and latch the door, depending on prevailing operating conditions.




In areas of high wind pressure and/or air conditioning pressures, the LCN Automatic Door Operators are recommended.



Lever dimensions

Plate dimensions for 995MF

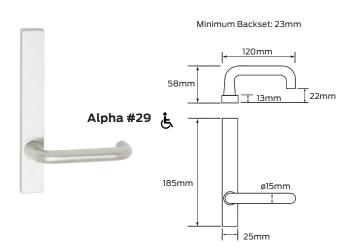




Plate function options - External plates



Plate function options - Internal plates





