


# PS914 Power Supply

Power supplies

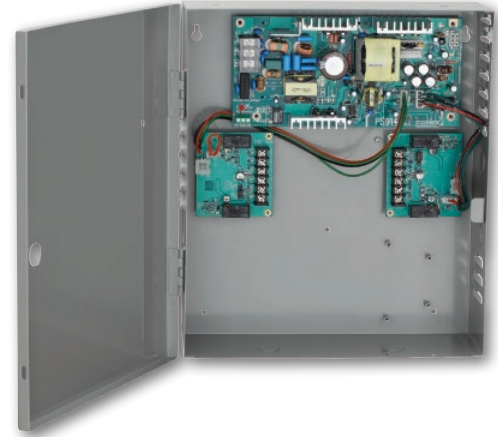

Von Duprin's power supply and option boards were designed to meet the specific requirements of electrified fire exit devices.

Installation is simplified by utilizing a flat mounting design and polarized locking connectors for option boards. This new design eliminates the need for racks and side connectors. The flat mounting of the option boards also provides for easier access to the terminal blocks for connection of electrified devices (such as electrified panic devices, strikes, card readers, etc.).

Common to the line of PS900 Series power supplies is a constant output rating at both 12v and 24v settings, universal 120 VAC to 240 VAC input, and polarized option board connectors. New fire alarm interface board mounting allows outputs to be configured as switched (power cut) or unswitched (power continues) when signal is provided.

All PS900 Series power supplies and option boards have been tested and certified to meet UL 294.

## Features

- 4A @ 12/24 VDC output, field selectable with jumper
- Designed with high inrush current for powering electrified panic devices
- Universal 120 - 240 VAC input
- Low voltage DC, regulated and filtered
- Electronic power limiting foldback circuit for AC current overload protection
- Two polarized connectors for distribution boards
- Fused primary input
- AC status monitor - isolated SPDT contacts
- AC input and DC output LED status indicators
- Cover mounted AC input indication
- Hinged cover with lock down screws
- High voltage protective cover
- DC Monitor - when used with battery back-up kit

# Specification guide

Prefix	Function
LE	Non monitored ..... 8800 Monitored ..... 8800M

1. Prefix  
All codes are prefixed with ..... LE
2. Function  
Select the desired function - e.g. non monitored ..... LE8800

## Options

- Emergency Interface/Fire Alarm Relay (FA)
- Key lock available for added security (KL)
- Battery backup
- 2 relay EL panic device control board
- 2 relay QEL panic device control board
- 4 relay distribution board
- 8 fused output distribution board
- 8 PTC output distribution board
- 4 relay distribution board with logic, field configurable for:
  - Time delay function
  - Auto operator
  - Security interlock

\* Optional distribution boards available with or without FA (Fire Alarm Relay)

Specification	
<b>Input voltage</b>	120/240 VAC, 50/60 Hz, universal input
<b>Output voltage</b>	4A @ 12 or 24 VDC Field selectable with jumper Switching supply, 5% regulation, 360mVpp max ripple
<b>Enclosure</b>	Grey/baked enamel 14" x 12" x 4" (H x W x D) Eight 1/2" x 3/4" knockouts Hinged cover with lock down screws
<b>Operating temperature</b>	32° - 120°F (0° - 49°C)
<b>Certifications</b>	UL 294 RoHS FCC Part 15 Class 2
<b>Option board compatibility</b>	900-BB: Battery backup 900-BAT: Backup battery pack 900-BBK: Battery backup kit (backup board and battery pack) 900-FA: Fire alarm (must be installed on distribution boards) 900-2RS*: 2 Relay EL panic device control board 900-4R*: 4 Relay output board 900-4RL*: 4 Relay logic board 900-8F*: Fused 8 zone distribution board 900-8P*: PTC 8 zone distribution board
<b>AC primary fuse size</b>	6.3A, 250v, 5 x 20mm SLOW-BLOW
<b>Battery fuse size</b>	7.5A 32v ATO blade style
<b>DC output protection</b>	Overload protection - current limited foldback circuit
<b>Indicators</b>	LED indicators: - AC input (visible on outside of enclosure) - DC output Isolated SPDT contacts to monitor AC power status
<b>Weight (power supply)</b>	Approx. 9.0 lbs
<b>Weight (each battery)</b>	4.0 lbs
<b>AC input termination</b>	3 position terminal block with protective cover Wire capacity: 10 AWG max.
<b>DC output termination</b>	2 position terminal block Wire capacity: 12 AWG max.
<b>Distribution board connectors</b>	2
<b>Fire alarm board connector</b>	No
<b>Keylock</b>	Optional